



amateur  
amateur



fire rescue  
fire rescue



air band  
air band



rescue  
rescue



marine  
marine

2009  
2010

VHF-UHF HAM

Antennas designed and manufactured in Italy

## Technological Research, Quality, Assurance

The history of Sirio Antenne Dates to the early-1970s when our Director, Giuseppe Grazioli founded the company. The product offering was a diverse mix of high quality antennas, serving primarily the German and Italian market. During this 30 year the company has experienced considerable growth on the international market and earned a reputation as a reliable, high quality supplier to the industry in the field of communication. Thanks to its high quality standards, technological research and know-how, Sirio Antenne has been able to develop a wide range of products in accordance with demand from the market.

We are listening to our customers. Providing efficient, effective solutions to their needs as expressed by them. TRY US!

## QUALITY SYSTEM

SIRIO antennae is a qualified ISO9001:2000 company since February 2004 Certification issued by international company DNV




## Research & Development Department

SIRIO Antenne develops OEM Projects upon customers' request



CAD station for mechanical design

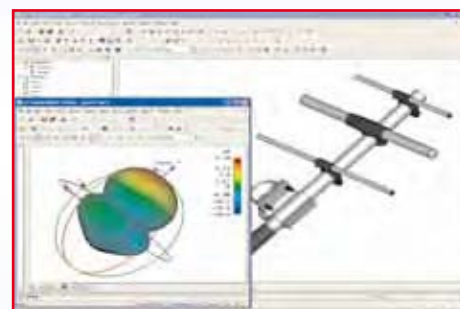

3D electromagnetics computer simulator



Microwave anechoic chamber.



Open site antenna measurement



RF & Microwave lab.



Computer controlled climatic chamber



## PRODUCTION DEPT



Mobile antennas production department



Base antennas production department



Final test with network analyzer



CNC winding machine



Ultrasonic welding machine

## MACHINES SHOP



HURCO machining centre



BIGLIA CNC-lathe



GILDEMEISTER Sliding headstock CNC-lathe



Moulds and equipments production: milling machine and spark erosion machine



CITIZEN Sliding headstock CNC-lathe

## WAREHOUSE DEPT



Incoming quantity check



Storing area zone A



Storing area zone B



## REFERENCE TABLE



Here below you'll find some tables that will help you find out the most suitable product for your purpose more easily in the catalogue.

**1) CHOOSE THE TYPE OF INSTALLATION.** BASE station antennas are in table **A**, MOBILE antennas (vehicular or portable) are in table **B** and MARINE antennas are in table **C**.

**2) CHOOSE THE FREQUENCY.** At the top of the table you can choose your desired frequency range. If it is not mentioned, you can select the nearest one.

**3) CHOOSE THE PRODUCT.** Follow the vertical line of the chosen frequency range till you find the **coloured squares** that show the frequency bands covered. The name of the product and its corresponding data page is on the left side. You can easily find the page of your selected product.

### ADDITIONAL INFORMATION

**RED:** means that the antenna is **TUNABLE**. The product doesn't cover the full band but just a part of it and the fine tuning can be obtained only by tuning one or more elements of the aerial. When the chosen frequency is written in this way 140...175 MHz it means that the product requires tuning.

**BLUE:** means that the antenna has a **FIXED** band and cannot be modified. No tuning is required and the corresponding frequency range is covered within a SWR limit indicated in the product's electrical data. In this case the frequency range will be indicated as: 400 - 470 MHz.

## TABLEAUX DE REFERENCES

Vous trouverez ci-dessous des tableaux qui faciliteront la recherche d'un produit dans le catalogue. La procédure de recherche est la suivante:

**1) CHOISIR LE TYPE D'INSTALLATION:** les antennes de stations **FIXES** sont dans le tableau **A**. Les antennes **MOBILES** et **PORTABLES** sont dans le tableau **B**. Les antennes **MARINES** sont dans le tableau **C**.

**2) CHOISIR LA FREQUENCE:** en haut du tableau, choisissez la bande de fréquences désirée. Si elle n'est pas mentionnée, veuillez choisir celle qui s'en rapproche le plus.

**3) CHOISIR LE PRODUIT:** suivez la ligne verticale de la gamme de fréquences choisie jusqu'à ce que vous trouviez les **emplacements colorés** qui désignent les bandes de fréquences couvertes. Le nom du produit et la page correspondante dans le catalogue sont sur le côté gauche. Vous trouverez ainsi plus facilement la page du produit sélectionné.

### INFORMATIONS COMPLEMENTAIRES

**ROUGE:** veut dire que l'antenne est **RÉGLABLE**. Le produit ne couvre pas totalement la bande complète mais juste une partie et le bon réglage peut être obtenu seulement en réglant un ou plusieurs éléments de l'aérien. Quand la bande de fréquences est séparée de 3 points: 140...175 MHz, cela signifie qu'il faut régler le produit.

**BLEU:** veut dire que l'antenne a une bande de fréquences **FIXE** et qu'on ne peut pas la modifier. Aucun réglage n'est nécessaire et la limite de SWR de la bande de fréquences couverte est indiquée dans les données électriques du produit. Dans ce cas, le début et la fin de la bande de fréquences sera séparée par un tiret: 400-470 MHz.



## TABELLE DI RICERCA



Qui di seguito sono riportate alcune tabelle con lo scopo di facilitare la ricerca dei prodotti. La procedura di ricerca consiste in:

**1) SCELTA TIPO DI INSTALLAZIONE.** Antenne per **stazione BASE** sono riportate in tabella **A**, antenne **MOBILE** per installazione su veicoli e/o per apparecchi portatili in tabella **B** e **NAUTICHE** in tabella **C**.

**2) SCELTA FREQUENZA DI LAVORO.** Individuare nella **riga superiore** delle tabella la frequenza di lavoro desiderata. Se non fosse riportata individuare quelle più vicine.

**3) SCELTA PRODOTTO.** Scorrere la riga verticale corrispondente alla frequenza di lavoro voluta fino ad incrociare i **rettangoli colorati** che indicano la banda di frequenza coperta. Pagina e modello sono riportati sulla stessa riga alla sinistra dei rettangoli così individuati. Consultare quindi la pagina del prodotto per conoscere tutte le particolarità.

### INFORMAZIONI AGGIUNTIVE

**ROSSO:** indica che l'antenna è **SINTONIZZABILE**. L'antenna non copre tutta la banda dichiarata contemporaneamente ma solo una sua porzione e la frequenza di lavoro dovrà essere scelta agendo sulla lunghezza di uno o più elementi dell'antenna stessa. La banda di frequenza indicata sarà separata da 3 puntini (es. 140...175 Mhz).

**AZZURRO:** indica che l'antenna ha una banda **FISSA** non modificabile. Non occorre tarare nulla e tutta la banda dichiarata è coperta entro un limite di SWR specificato. In questo caso nella pagina del prodotto gli estremi della frequenza di lavoro saranno separati da un trattino (es. 400 - 470 Mhz).



## INDICE



A continuación algunas referencias para facilitar la búsqueda de los productos. El procedimiento de la búsqueda consiste en:

**1) TIPO DE INSTALACIÓN ELEGIDA.** Antenas para estación **BASE** indicadas en la tabla **A**, antenas **MÓVILES** para la instalación en vehículos y/o para los equipos portátiles, en la tabla **B** y antenas **MARINAS** en la tabla **C**.

**2) ELECCION DE LA FRECUENCIA.** Seleccione en la línea superior de la tabla, el rango de frecuencia deseado. Si la frecuencia de trabajo no está indicada, usted puede seleccionar la más cercana.

**3) ELECCION DEL PRODUCTO.** Siga la línea vertical correspondiente al rango de frecuencia escogida hasta que usted encuentra los **cuadrados coloreados** que muestran las bandas de frecuencia cubiertas. El nombre del producto y los datos correspondientes, está en el lado izquierdo de la página. De esta manera, usted puede encontrar la página de su producto fácilmente.

### INFORMACION ADICIONAL

**ROJO:** indica que la antena es **SINTONIZABLE**. La antena no cubre toda la banda de frecuencia deseada, solo una parte. Deberemos seleccionar y ajustar la longitud de uno o más elementos de la antena. Cuando la banda de frecuencias se separa de 3 puntos: 140...175 MHz, eso significa qu'il es necesario regular el producto.


**AZUL:** indica que la antena es de banda **FIJA**, no es modificable. No requiere ningún ajuste. El rango de frecuencia esta en el limite del SWR. Ejemplo (400-470 MHz).


The frequencies table for the most common systems / Tabella delle bande di frequenze dei sistemi più utilizzati

Band	Frequency	System / Name	Band	Frequency	System / Name
VHF	30 - 68 MHz	Low Band	UHF	450 - 470 MHz	NMT 450
VHF	68 - 87.5 MHz	4m band	UHF	824 - 896 MHz	AMPS
VHF	87.5 - 108 MHz	FM radio	UHF	810 - 958 MHz	DoCoMo
VHF	108 - 136 MHz	Aircraft radio	UHF	880 - 960 MHz	GSM 900
VHF	146 - 174 MHz	2m band	UHF	890 - 960 MHz	NMT 900, Natel C
UHF	225 - 380 MHz	Aircraft radio	VHF	1575.42 MHz	GPS
UHF	380 - 400 MHz	TETRA (Terrestrial Trunked Radio)	UHF	1710 - 1880 MHz	PCN / GSM 1800, DCS 1800
UHF	400 - 470 MHz	70 cm band	UHF	1850 - 1990 MHz	PCS, DCS 1900 / GSM 1900
UHF	410 - 430 MHz	Trunking system, Chekker, Modacom, Mobitex	UHF	1920 - 2170 MHz	UMTS


Band Designation	Frequency MHz
HF (high frequency)	3 30 300 3000
VHF (very high frequency)	
UHF (ultra high frequency)	



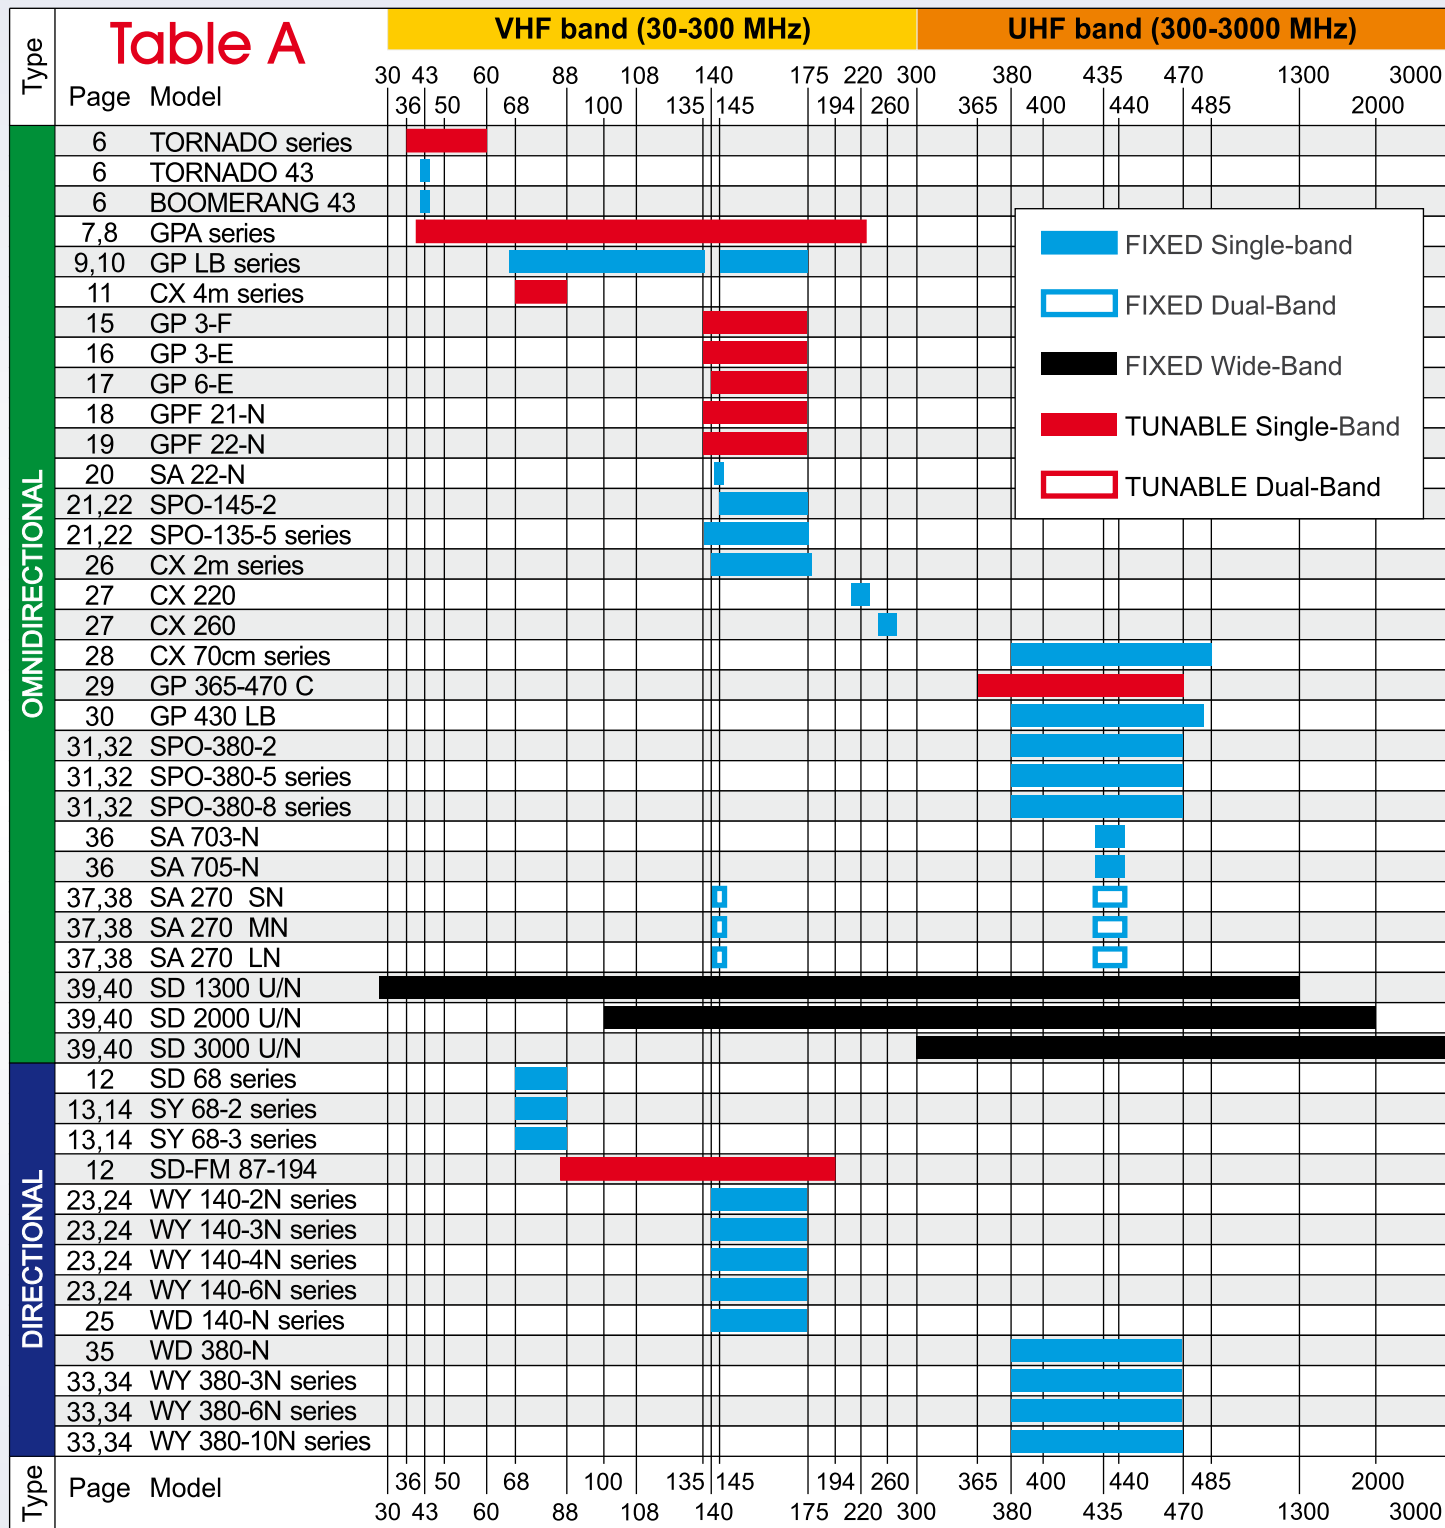

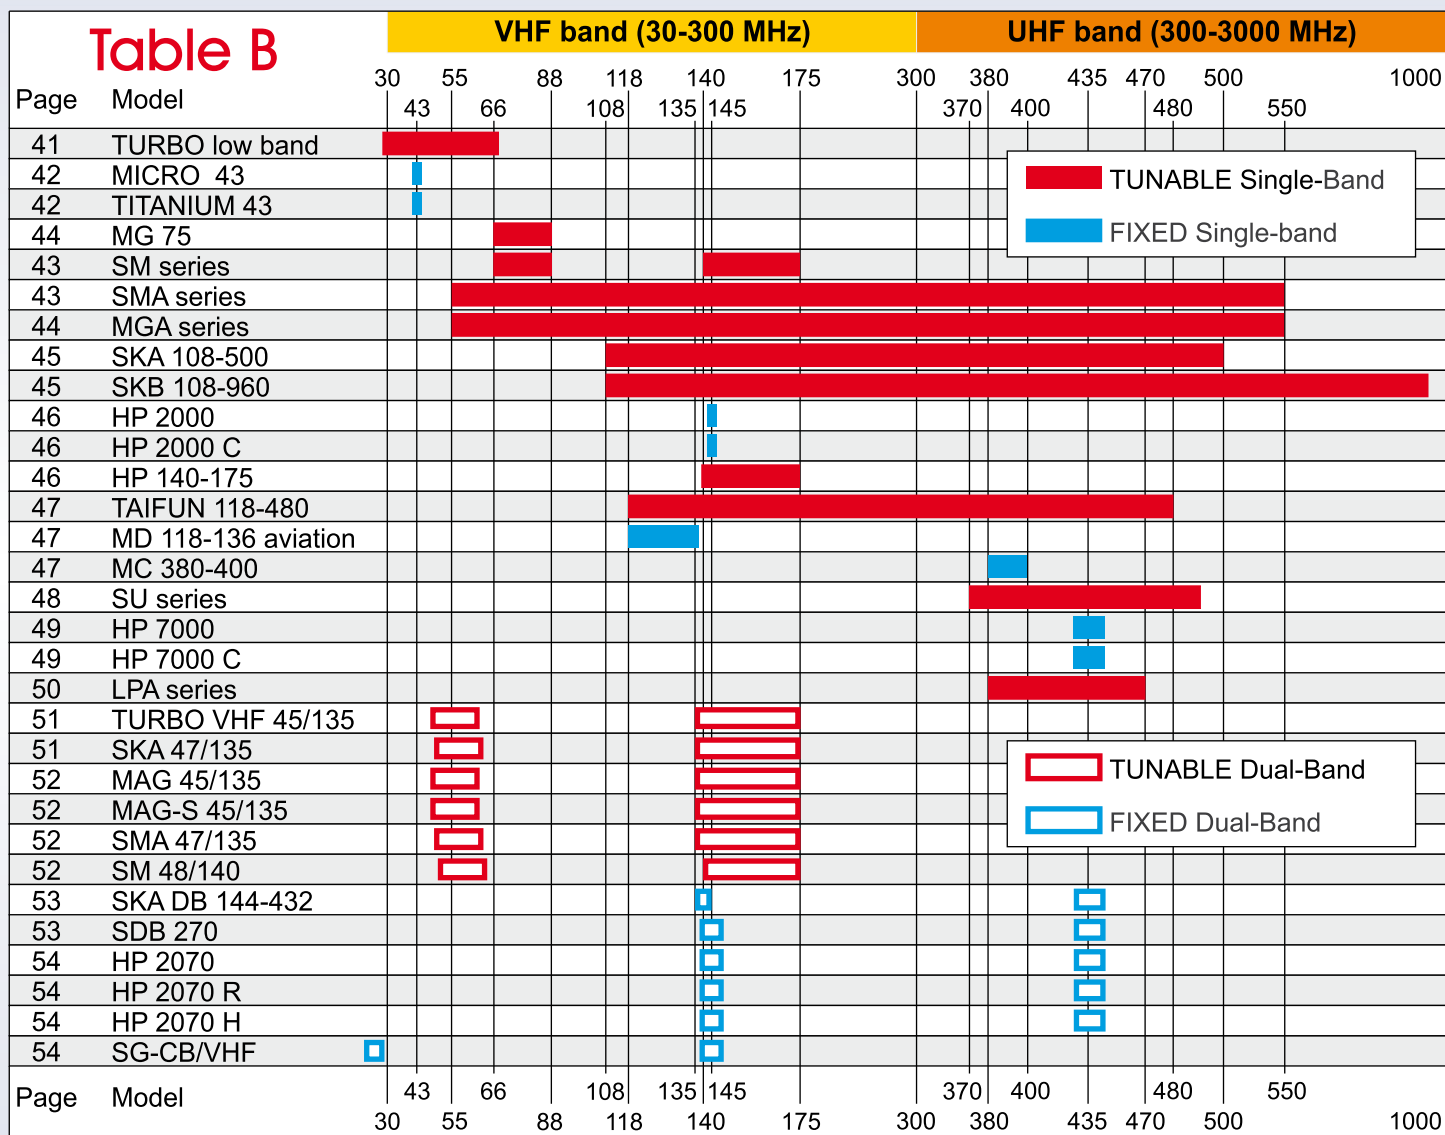

## Marine antennas

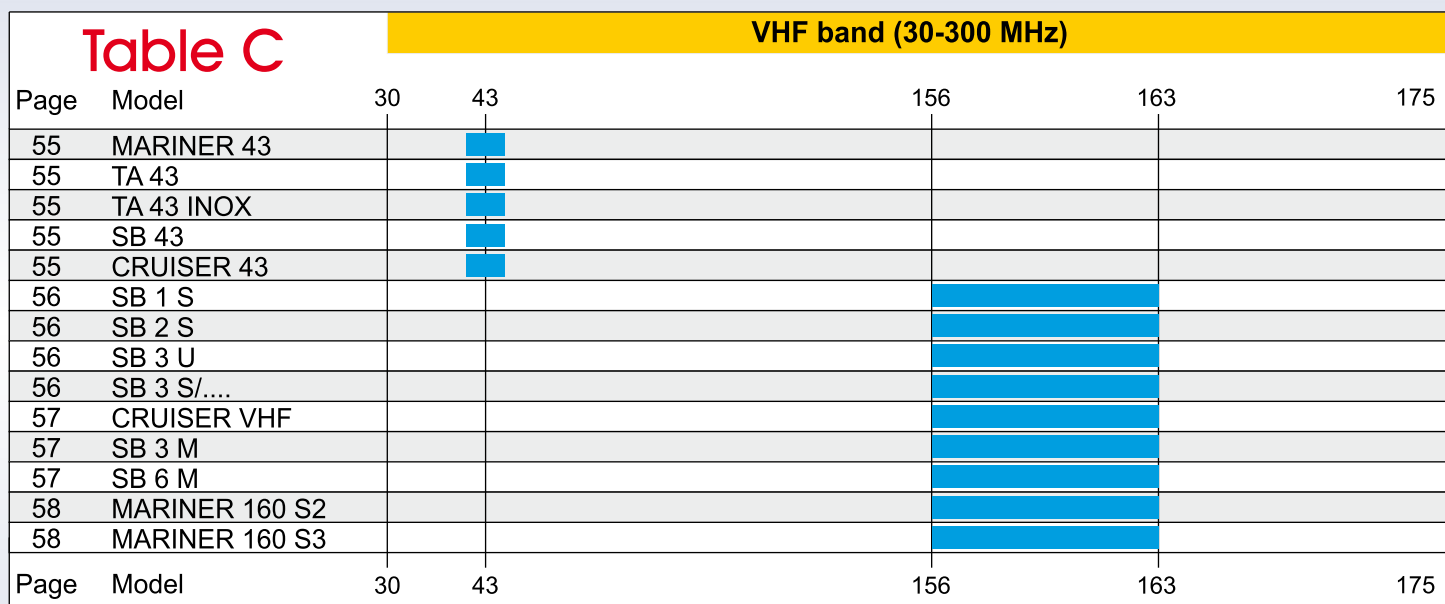



## CX 70 cm series

CoaXial J-pole

380-485 MHz


### Features:

- # Base station antenna, Low-gain
- # Omnidirectional, Mono-band
- # Protection from static discharges DC-Ground
- # Made of aluminium alloy 6063 T-832

TYPICAL RADIATION PATTERN in E-plane at mid band

File: E-03-002



Scale: logarithmic

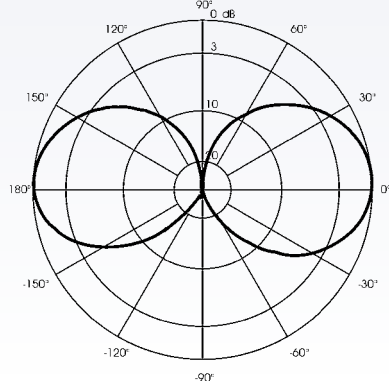

TYPICAL S.W.R. RESPONSE

S.W.R. Model: CX 380

File: F-03-039

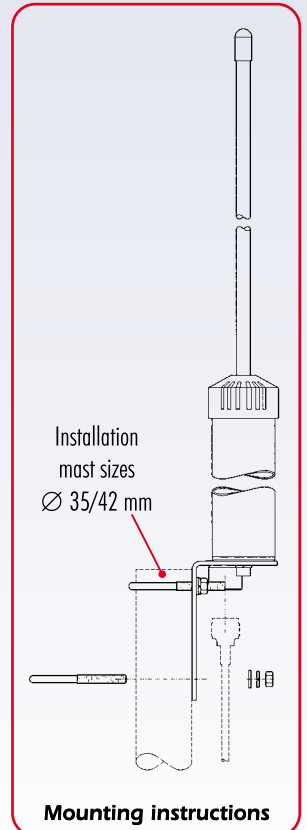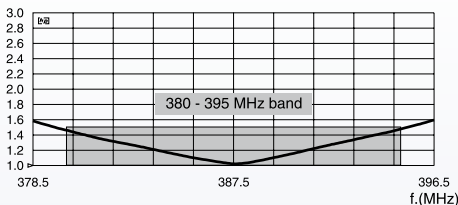

Electrical Data	CX 380	CX 395	CX 410	CX 425	CX 440	CX 455	CX 470
Type	3/4 λ Coaxial J-pole						
Frequency Range @ SWR ≤ 1.5	380-395 MHz	395-410 MHz	410-425 MHz	425-440 MHz	440-455 MHz	455-470 MHz	470-485 MHz
Impedance	50 Ω						
Radiation (H-plane)	360° Omnidirectional						
Radiation (E-plane)	beamwidth @ -3 dB = 60°						
Radiation angle deg.	0°						
Polarization	Linear Vertical						
Gain	2 dBd - 4.15 dBi						
Max Power (CW) @ 30°C	200 Watts						
Grounding Protection	All metal parts are DC-grounded, the inner conductor shows a DC short						
Connector	N-female						
Mechanical Data							
Materials	Aluminium, Zamak, Steel, Brass						
Wind Load @ 150 km/h	25 N	25 N	25 N	25 N	24 N	23 N	23 N
Wind Resistance	180 Km/h						
Wind Surface	0.02 m²						
Height (approx.)	665 mm	645 mm	625 mm	605 mm	590 mm	575 mm	558 mm
Weight (approx.)	540 gr						
Mounting Mast	Ø 35 - 42 mm						
P/N	2104101.00	2107301.00	2102501.00	2102601.00	2102701.00	2102801.00	2107701.00

# GP 365-470 C

## Ground Plane

### 365...470 MHz

#### Features:


- # Omnidirectional base station antenna
- # Medium-gain, Mono-band
- # Tunable by whip cutting
- # Made of anodized aluminium alloy
- # Stainless steel hardware and radials
- # Equipped with anodized aluminium bracket for an easy side mast installation
- # 17/7 PH stainless steel spring whip

Electrical Data	GP 365-470 C
Type	$1/4 \lambda + 1/2 \lambda$ Colinear
Frequency Range	tunable 365...470 MHz
Impedance	$50 \Omega$
Radiation (H-plane)	$360^\circ$ Omnidirectional
Radiation (E-plane)	Beamwidth @ -3dB = $53^\circ$
Radiation angle deg.	$0^\circ$
Polarization	Linear Vertical
Gain	2.5 dBd - 4.65 dBi
SWR @ res. freq.	see diagram
Bandwidth @ SWR $\leq 1.5$	see diagram
Max Power (CW) @30°C	150 Watts
Connector	N-female, gold plated central pin


#### Mechanical Data

Materials	Aluminium, Brass, Stainless Steel
Wind Load at 150 km/h	18 N
Wind Resistance	180 Km/h
Wind Surface	$0.02 \text{ m}^2$
Height (approx.)	990 mm
Weight (approx.)	730 gr
Radial Length (approx.)	200 mm
Mounting Mast	$\varnothing 35-54 \text{ mm}$
P/N	2102105.00


TYPICAL S.W.R. RESPONSE

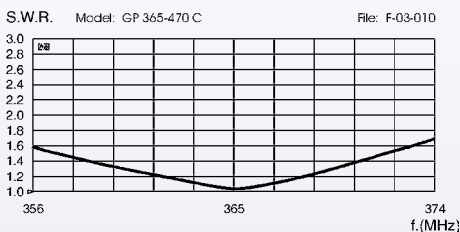


TYPICAL RADIATION PATTERN in E-plane at 435 MHz  
File: E-03-010 Scale: logarithmic

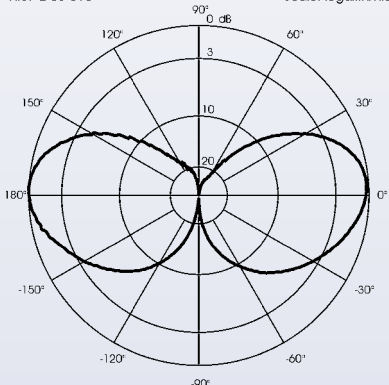

TYPICAL MATCHING DIAGRAM vs FREQUENCY

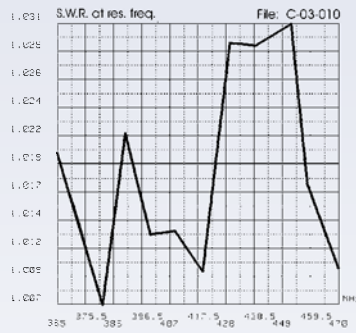

TYPICAL BANDWIDTH DIAGRAM vs FREQUENCY

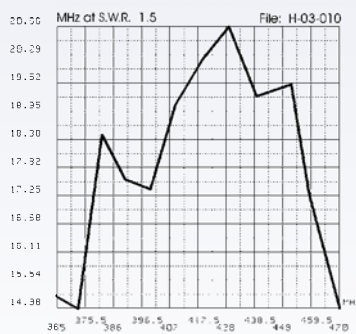

strong brass mount


Installation mast sizes  
 $\varnothing 35/54 \text{ mm}$

aluminium fixing tube


Mounting and tuning instructions



TYPICAL TUNING DIAGRAM vs FREQUENCY

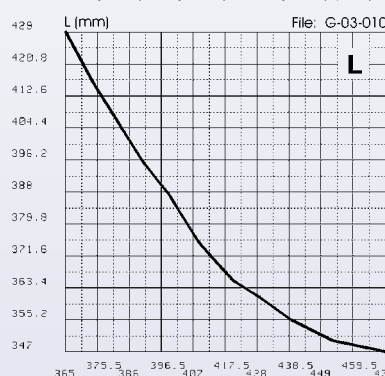

TYPICAL TUNING DIAGRAM vs FREQUENCY

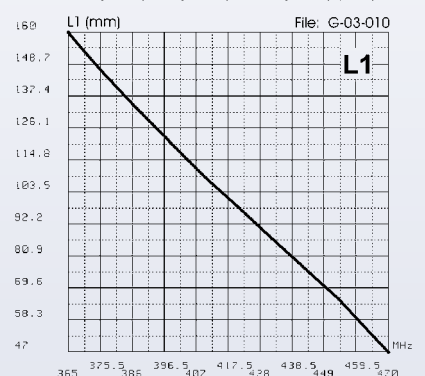

\* Use the curves just as a guide. For fine-tuning please use an SWR-meter



## GP 430 LB

Ground Plane Large Band 380-480 MHz


### Features:

- # Base station antenna, Wide-band
- # Unity-gain, Omnidirectional
- # Protection from static discharges DC-Ground
- # Made of anodized aluminium alloy
- # Protection against the worst weather conditions
- # Radials locking system "screw-on"
- # Stainless steel hardware
- # Side mast mounting allowed by optional bracket FT-2 code 2510004.00

Electrical Data	GP 430 LB
Type	1/4 $\lambda$ Ground Plane Large Band
Design Frequency @ SWR $\leq$ 1.7	380 - 480 MHz
Impedance	50 $\Omega$
Radiation (H-plane)	360° Omnidirectional
Radiation (E-plane)	Beamwidth @ -3dB = 80°
Radiation angle deg.	0°
Polarization	Linear Vertical
Gain	0 dBd - 2.15 dBi
Max Power (CW) @ 30°C	300 Watts
Grounding Protection	All metal parts are DC-grounded, inner conductor shows a DC short
Connector	UHF-female or N-female





Mechanical Data	
Materials	Anodized Aluminium, Nylon, Stainless steel
Wind Load at 150 km/h	18 N
Wind Resistance	180 Km/h
Wind Surface	0.02 m <sup>2</sup>
Height (approx.)	295 mm
Weight (approx.)	830 gr
Radial Length (approx.)	200 mm
Mounting Mast	$\varnothing$ 36-40 mm
P/N with "UHF" connector	2103701.00
P/N with "N" connector	2103701.00/N

TYPICAL S.W.R. RESPONSE

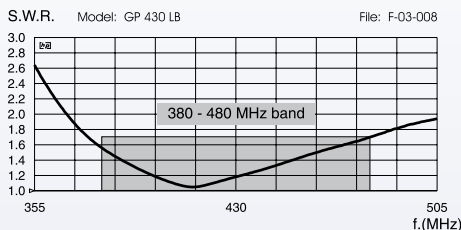

TYPICAL RADIATION PATTERN in E-plane at mid-band

File: E-03-008 Scale: logarithmic

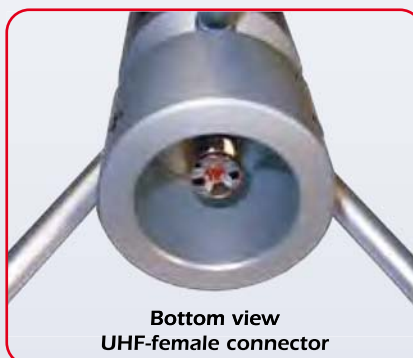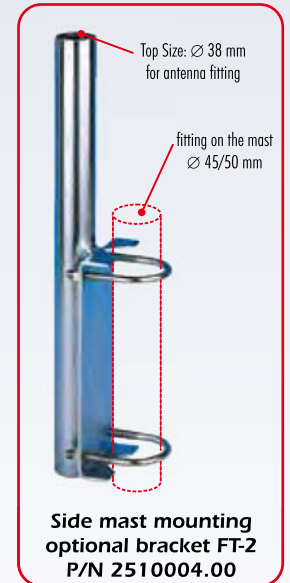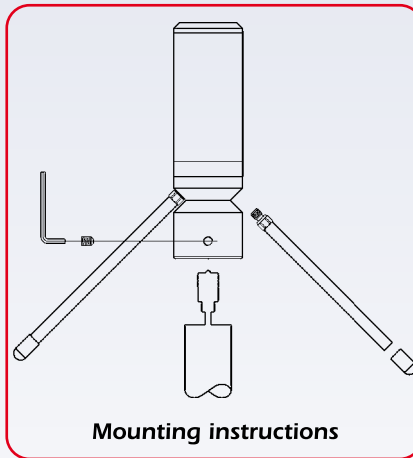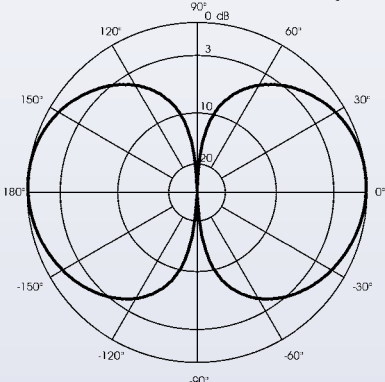

## SPO series

Sirio Professional Omni 380-470 MHz

### **WIDE-BAND** *Fiberglass dipole and colinear*



Easy and robust  
installation on  
the mast



**Connector  
protection cap**




#### **Fixing bracket:**

Spare parts: p/n SA104  
Materials: extruded aluminum  
Hardware: stainless  
Dimensions : 80 x 76 x 25 mm  
Weight: 220 gr

**SPO 380-2  
Dipole**

**SPO 380-5  
SPO 420-5  
Colinear**

**SPO 380-8  
SPO 400-8  
SPO 420-8  
SPO 440-8  
Colinear**

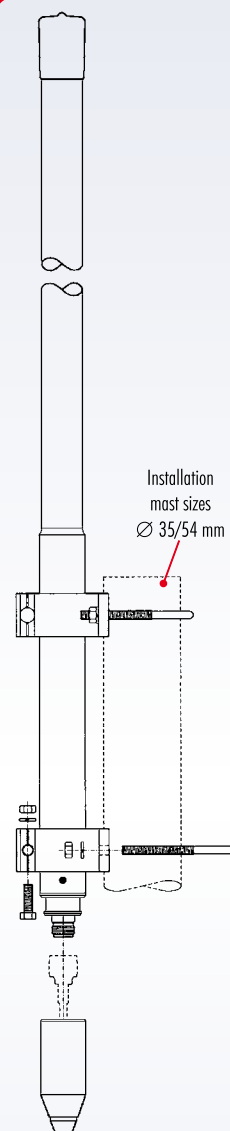

Installation  
mast sizes  
Ø 35/54 mm

**Mounting instructions**



## SPO series

### Sirio Professional Omni 380-470 MHz




#### Features:

- # Fiberglass wide-band omnidirectional base station antenna
- # SPO 380-2: Unity-gain; SPO 380/420-5: Medium-gain; SPO 380/400/420/440-8: High-gain
- # Perfect protection against the worst weather conditions; Protection from static discharges DC-Ground
- # Designed to work without Ground Plane; Stainless steel hardware

Electrical Data	SPO 380-2	SPO 380-5	SPO 420-5	SPO 380-8	SPO 400-8	SPO 420-8	SPO 440-8
Type	Dipole	Colinear					
Frequency Range @ SWR ≤ 1.5	380-470 MHz	380-430 MHz	420-470 MHz	380-406 MHz	400-430 MHz	420-450 MHz	440-470 MHz
Impedance	50 Ω						
Radiation (H-plane)	360° Omnidirectional						
Radiation (E-plane) beamwidth @ -3 dB	78°	40°	40°	14°	14°	14°	14°
Polarization	Linear Vertical						
Gain	0 dBd - 2.15 dBi	3 dBd - 5.15 dBi	3 dBd - 5.15 dBi	6 dBd - 8.15 dBi	6 dBd - 8.15 dBi	6 dBd - 8.15 dBi	6 dBd - 8.15 dBi
Max Power (CW) @ 30° C	75 Watts						
Grounding Protection	All metal parts are DC-grounded, the inner conductor shows a DC short						
Connector	N-female with rubber protection cap						

#### Mechanical Data


Materials	White cilindrical fiberglass radome Ø 28.6 mm, anodized 6063-T5 aluminium, brass, stainless steel, copper, EPDM rubber						
Wind Load @ 150 km/h	33 N	53 N	53 N	104 N	104 N	98 N	93 N
Wind Resistance	200 Km/h	180 Km/h	180 Km/h	150 Km/h	150 Km/h	150 Km/h	150 Km/h
Wind Surface	0.027 m <sup>2</sup>	0.044 m <sup>2</sup>	0.044 m <sup>2</sup>	0.089 m <sup>2</sup>	0.089 m <sup>2</sup>	0.083 m <sup>2</sup>	0.079 m <sup>2</sup>
Height (approx.)	780 mm	1380 mm	1380 mm	2940 mm	2940 mm	2740 mm	2590 mm
Weight (approx.)	890 gr	1215 gr	1200 gr	2040 gr	2020 gr	1935 gr	1850 gr
Operating temperature	-40° C to +80° C						
Mounting Mast	Side mast whit "V" bolt Ø 35 - 54 mm						
P/N	2115020/380	2115120/380	2115120/420	2115320/380	2115320/400	2115320/420	2115320/440

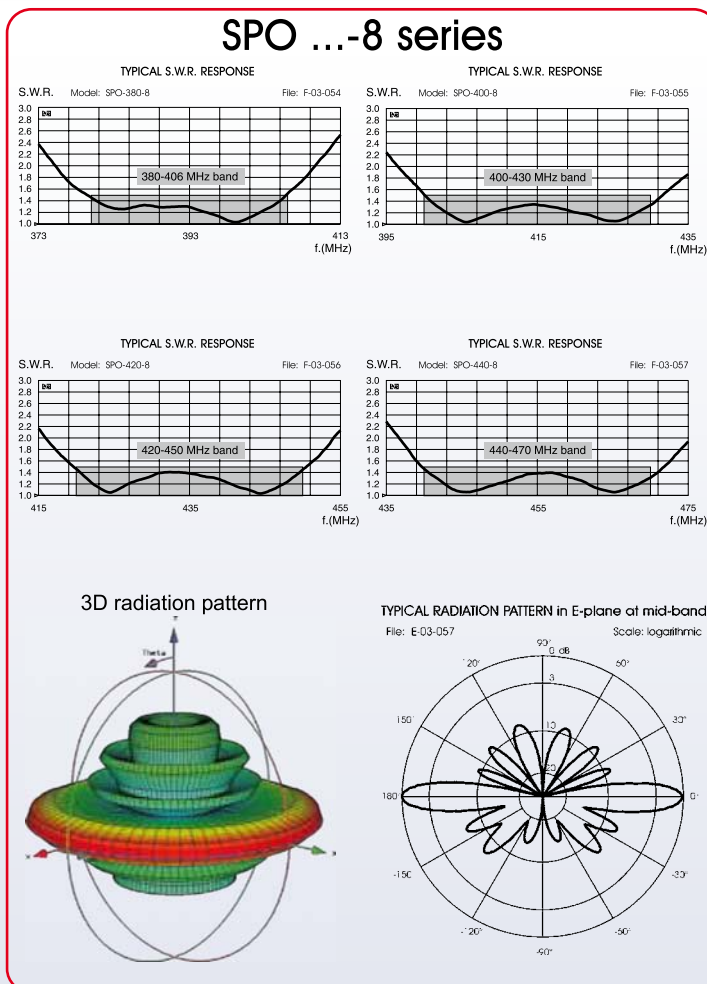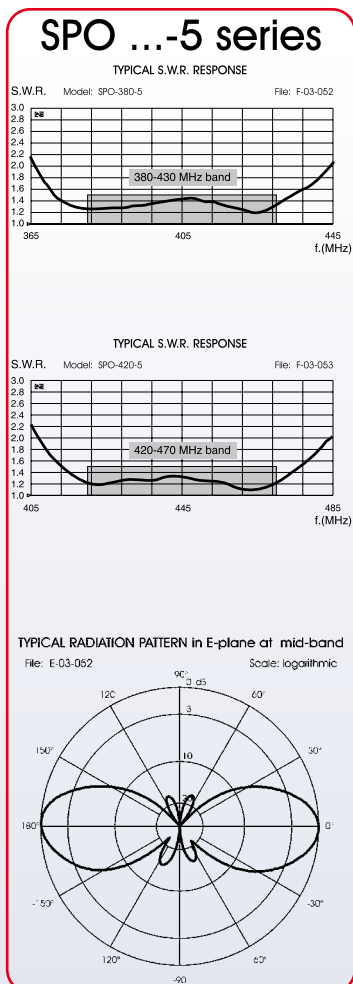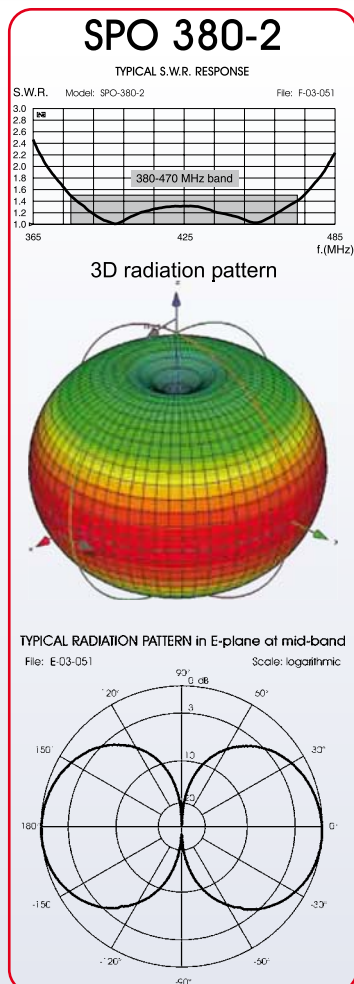


## WY series

### Wide-band Yagi 380-470 MHz

WY 380-10N  
WY 400-10N

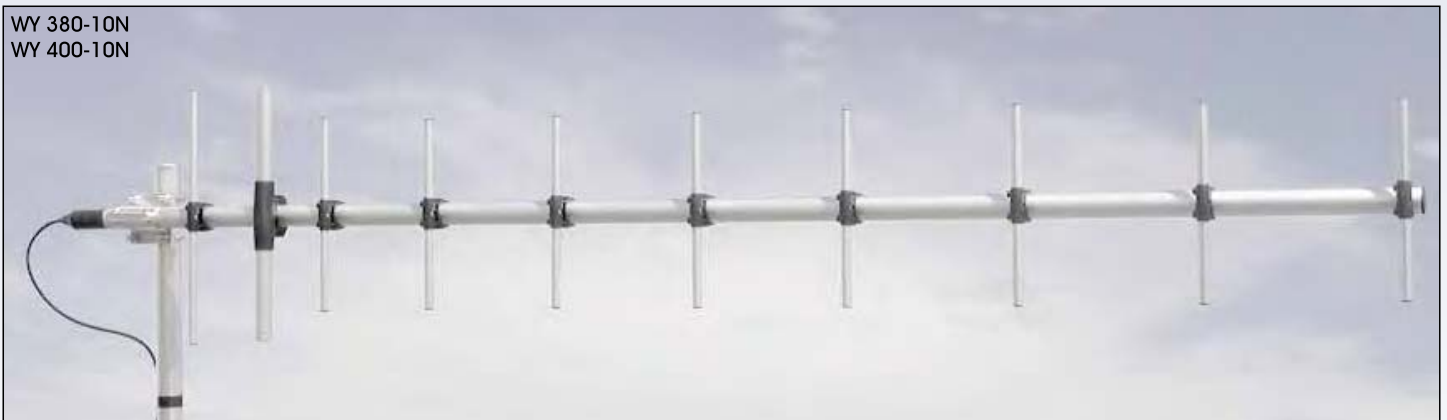

WY 380-6N  
WY 400-6N

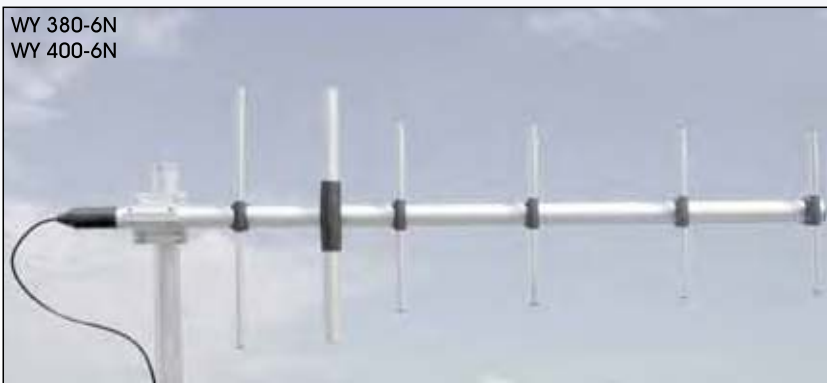


#### Optional Tilting bracket P/N 2519803.00

Materials & Hardware: zinc plated steel  
Dimensions: 110 x 150 x 6 mm.  
Weight: 800 gr

#### Standard Mounting bracket

Materials: extruded aluminum  
Hardware: stainless & zinc plated steel  
Dimensions: 80 x 76 x 65 mm  
Weight: 460 gr












WY 380-3N  
WY 400-3N



**WIDE-BAND YAGI**  
New feed system for  
High symmetrical pattern  
Completely computer  
designed for the  
best performances  
Patent pending

#### 3D radiation pattern





## WY series

### Wide-band Yagi 380-470 MHz


#### Features:

- # Wide-band directional base station antenna
- # Exclusive feed system conceived for the highly symmetrical radiation pattern in both planes (E and H), patent pending applied
- # Completely computer designed to get the best performance of gain and front-to-back ratio in the band of interest
- # Made of anodized 6063-T5 aluminium, extruded aluminium bracket, rear mounting
- # N female connector protected by EPDM rubber cap for RG58 or RG213 cables
- # Stacked & bayed array for higher gain, Optional tilting bracket


Electrical Data	WY 380-3N	WY 400-3N	WY 380-6N	WY 400-6N	WY 380-10N	WY 400-10N
Type	3 elements Yagi		6 elements Yagi		10 elements Yagi	
Frequency Range @ SWR ≤ 1.5	380-440 MHz	400-470 MHz	380-440 MHz	400-470 MHz	380-440 MHz	400-470 MHz
Impedance	50 Ω					
Radiation (H-plane) beamwidth @ -3 dB	125°	125°	70°	70°	50°	50°
Radiation (E-plane) beamwidth @ -3 dB	65°	65°	55°	55°	45°	45°
Front to back ratio	≥ 17 dB	≥ 17 dB	≥ 17 dB	≥ 17 dB	≥ 18 dB	≥ 18 dB
Polarization	Linear Vertical or Horizontal					
Gain	4.85 dBd - 7 dBi	4.85 dBd - 7 dBi	8.85 dBd - 11 dBi	8.85 dBd - 11 dBi	11.85 dBd - 14 dBi	11.85 dBd - 14 dBi
Max Power (CW) @30° C	150 Watts					
Grounding Protection	All metal parts are DC-grounded, the inner conductor shows a DC short					
Connector	N-female with rubber protection cap					
Mechanical Data						
Materials	Anodized 6063-T5 Aluminium, EPDM rubber, thermoplastic UV stabilized, Chromed Brass					
Wind Load @ 150 km/h	65 N	63 N	100 N	96 N	150 N	142 N
Wind Resistance	180 Km/h	180 Km/h	150 Km/h	150 Km/h	120 Km/h	120 Km/h
Wind Surface	0.048 m²	0.047 m²	0.078 m²	0.075 m²	0.121 m²	0.115 m²
Dimensions W x H (approx.)	565 x 400 mm	525 x 375 mm	1180 x 400 mm	1130 x 375 mm	2125 x 400 mm	2000 x 375 mm
Turning radius (approx.)	460 mm	420 mm	1050 mm	1000 mm	1990 mm	1860 mm
Weight (approx.)	1130 gr	1100 gr	1540 gr	1490 gr	2120 gr	2040 gr
Operating temperature	-40° C to +60° C					
Mounting Mast	Ø 35 - 52 mm					
Boom / Dipole / Element Diameter	Ø 32 mm / Ø 24 mm / Ø 12 mm					
P/N	2113501/380	2113501/400	2113601/380	2113601/400	2113701/380	2113701/400

#### WY 380-3N

TYPICAL S.W.R. RESPONSE




TYPICAL GAIN DIAGRAM vs FREQUENCY




#### WY 400-3N

TYPICAL S.W.R. RESPONSE




TYPICAL GAIN DIAGRAM vs FREQUENCY




#### WY 380-6N

TYPICAL S.W.R. RESPONSE




TYPICAL GAIN DIAGRAM vs FREQUENCY




#### WY 400-6N

TYPICAL S.W.R. RESPONSE




TYPICAL GAIN DIAGRAM vs FREQUENCY




#### WY 380-10N

TYPICAL S.W.R. RESPONSE




TYPICAL GAIN DIAGRAM vs FREQUENCY




#### WY 400-10N

TYPICAL S.W.R. RESPONSE



TYPICAL GAIN DIAGRAM vs FREQUENCY



## WD 380-N

### Wide-band Dipole

### 380-470 MHz

#### Features:

- # Base station antenna, Directional,
- # Wide band, no tuning required
- # Exclusive feed system
- # Made of anodized 6063-T5 aluminium
- # Extruded aluminium bracket, rear mounting
- # N female connector protected by EPDM rubber cap for RG58 or RG213 cables


Electrical Data	WD 380-N
Type	Dipole
Frequency Range @ SWR ≤ 1.5	380 - 470 MHz
Impedance	50 Ω
Radiation (H-plane) beamwidth @ -3 dB	200°
Radiation (E-plane) beamwidth @ -3 dB	68°
Front to back ratio	≥ 8 dB
Polarization	Linear Vertical
Gain	2.35 dBd - 4.5 dBi
Max Power (CW) @30°C	150 Watts
Grounding Protection	All metal parts are DC-grounded, inner conductor shows a DC short
Connector	N-female with rubber protection cap

Mechanical Data	
Materials	Anodized 6063-T5 Aluminium, EPDM rubber, thermoplastic UV stabilized, Chromed Brass
Wind Load @ 150 km/h	48 N
Wind Resistance	200 Km/h
Wind Surface	0.033 m <sup>2</sup>
Dimensions W x H (approx.)	380 x 340 mm
Turning radius (approx.)	240 mm
Weight (approx.)	950 gr
Operating temperature	-40° C to +60° C
Mounting Mast	Ø 35 - 52 mm
Boom Diameter / Element Diameter	Ø 32 mm / Ø 24 mm
P/N	2113301/380




#### WD 380-N

#### 3D radiation pattern

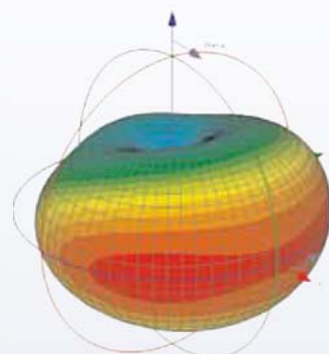


#### TYPICAL RADIATION PATTERN in E-plane at 425 MHz


File: E-03-043 Scale: logarithmic

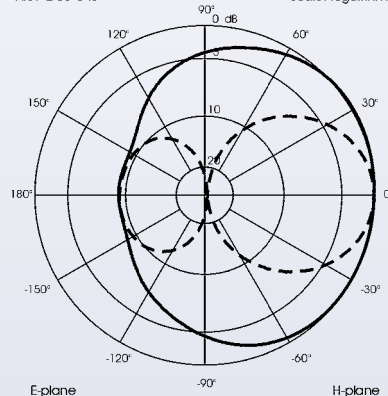


#### TYPICAL GAIN DIAGRAM vs FREQUENCY

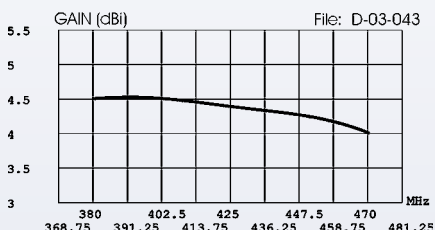

#### TYPICAL S.W.R. RESPONSE

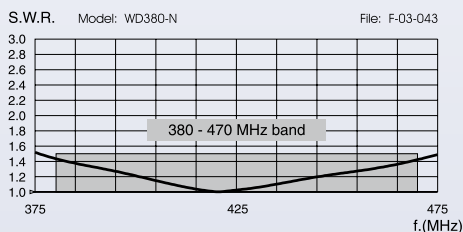

Materials: extruded aluminum  
 Hardware: stainless & zinc plated steel  
 Dimensions : 80 x 76 x 65 mm  
 Weight: 460 gr



Mounting bracket

## SA 703-N, SA 705-N






### Sirio Amateur 70cm band

#### Features:

- # Base station antenna, Mono-band
- # High-gain, Omnidirectional
- # Protection from static discharges DC-Ground
- # Stainless steel hardware and radials
- # Equipped with anodized aluminium bracket
- # High quality fiberglass radiator made of brass and copper

Electrical Data	SA 703-N	SA 705-N
Type	3 x 5/8 $\lambda$ Ground Plane Colinear	5 x 5/8 $\lambda$ Ground Plane Colinear
Frequency Range	427 - 443 MHz @ SWR $\leq$ 2	
Impedance	50 $\Omega$	
Radiation (H-plane)	360° Omnidirectional	
Radiation (E-plane)	Beamwidth @ -3 dB = 24°	Beamwidth @ -3 dB = 17°
Radiation angle deg.	0 °	-1.5°
Polarization	Linear Vertical	
Gain	4.6 dBd - 6.75 dBi	7.1 dBd - 9.25 dBi
Max Power (CW) @30°C	200 Watts	
Grounding Protection	All metal parts are DC-grounded, the inner conductor is coupled capacitively	
Connector	N-female, gold plated central pin	
Mechanical Data		
Materials	Fiberglass, Aluminium Stainless Steel, Brass	
Wind Load at 150 km/h	56 N	81 N
Wind Resistance	180 Km/h	160 Km/h
Wind Surface	0.05 m <sup>2</sup>	0.07 m <sup>2</sup>
Height (approx.)	1780 mm	2790 mm
Weight (approx.)	900 gr	1100 gr
Radial Length (approx.)	170 mm	
Mounting Mast	Ø 35-54 mm	
P/N	2106320.00	2106820.00

**SA703-N and SA 705-N are available for USA ham band (440-450 MHz)**

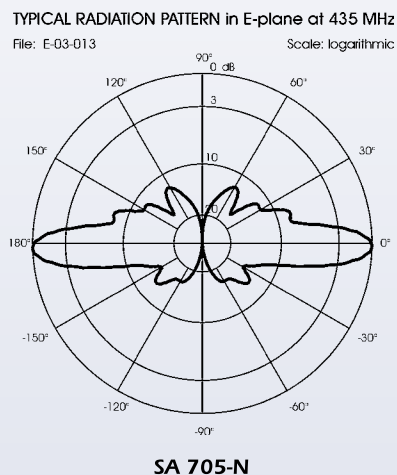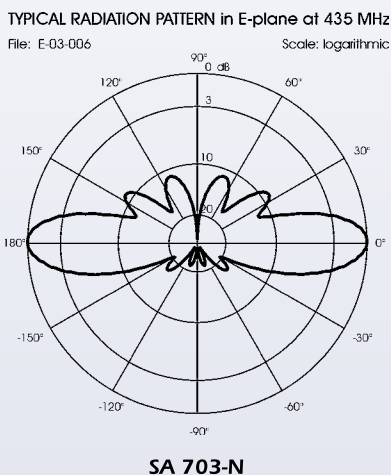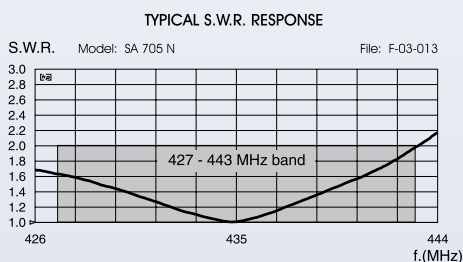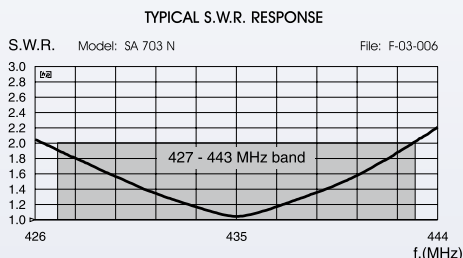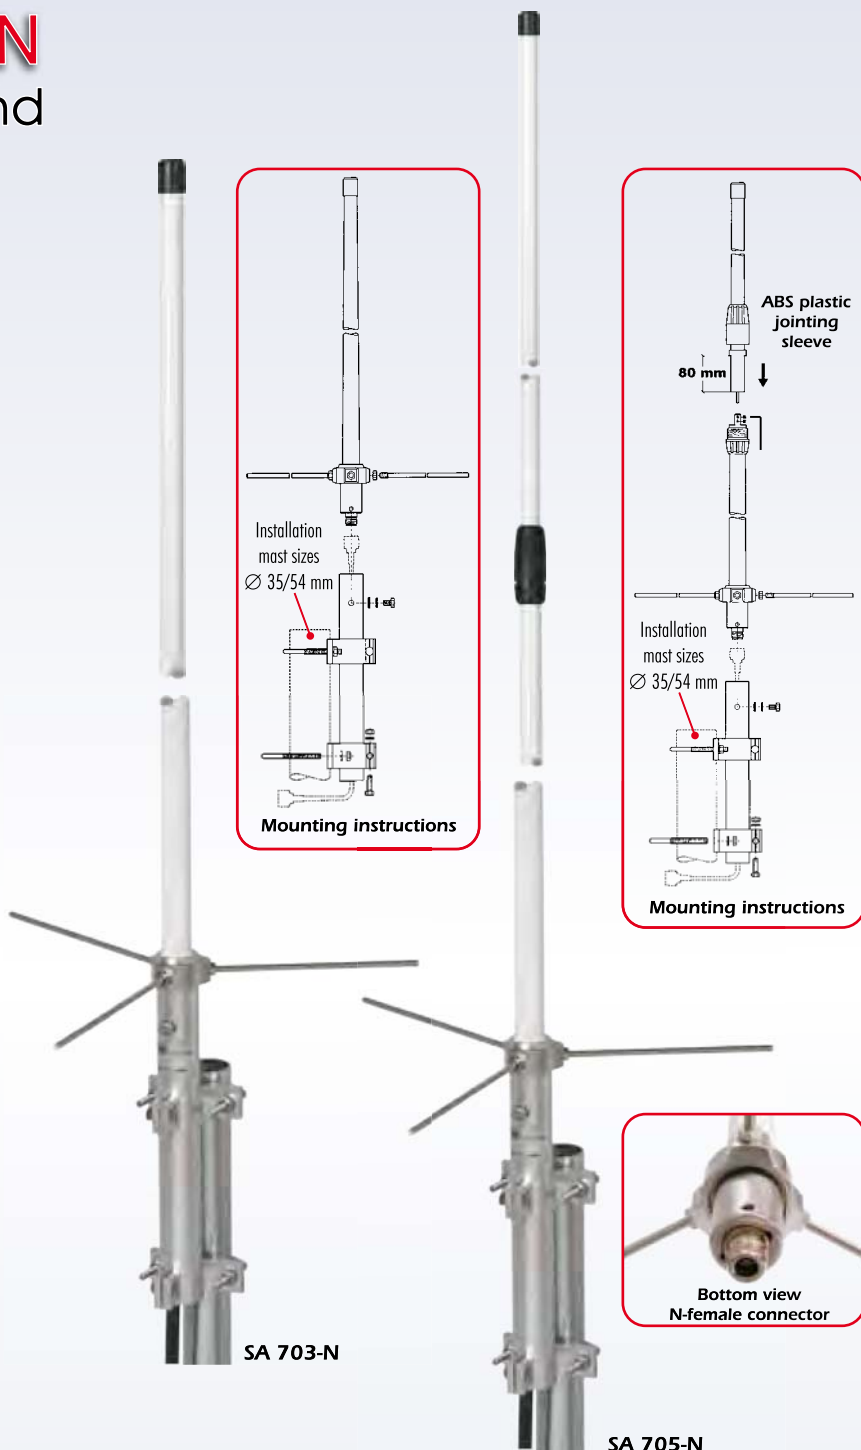




### SA 270 series

#### Sirio Amateur 2m & 70 cm band

##### Features:


- # Base station antenna, Dual-band, Omnidirectional
- # SA 270 SN: VHF Low-gain, UHF Medium-gain
- SA 270 MN: VHF Low-gain, UHF High-gain
- SA 270 LN: VHF Medium-gain, UHF High-gain
- # Protection from static discharges DC-Ground
- # Stainless steel hardware and radials
- # Equipped with anodized aluminium bracket for an easy side mast installation
- # High quality whip made of brass and copper protected by fiberglass tube

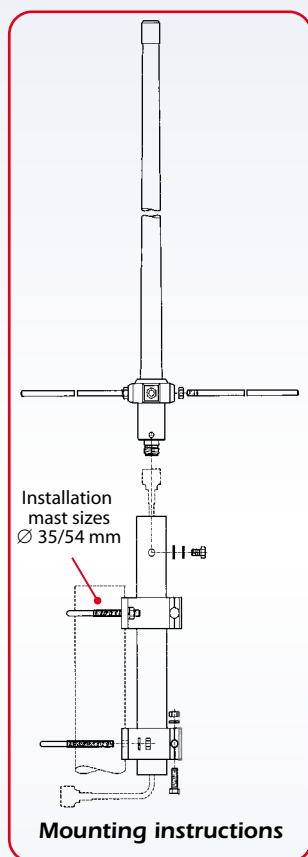

SA 270 SN  
SA 270 MN



ABS plastic  
jointing  
sleeve

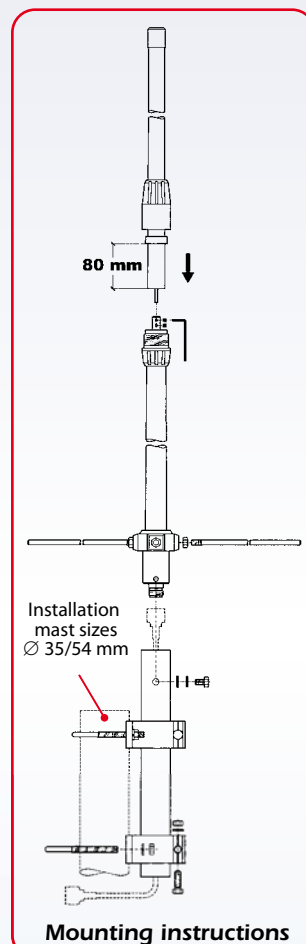

SA 270 LN



## SA 270 series

### Sirio Amateur 2m & 70cm band

Electrical Data	SA 270 SN	SA 270 MN	SA 270 LN
Type	VHF: 1/2 $\lambda$ , UHF: 2 x 5/8 $\lambda$ Colinear	VHF: 6/8 $\lambda$ , UHF: 3 x 5/8 $\lambda$ Colinear	VHF: 2x5/8 $\lambda$ , UHF: 5x5/8 $\lambda$ Colinear
Frequency Range @ SWR $\leq$ 2	VHF: 142-148 MHz UHF: 426-443 MHz	VHF: 142-148 MHz UHF: 426-443 MHz	VHF: 143.3-146.7 MHz UHF: 424-442 MHz
Impedance	50 $\Omega$		
Radiation (H-plane)	360° Omnidirectional		
Radiation (E-plane)	Beamwidth @ -3dB = VHF: 68°, UHF: 36°	Beamwidth @ -3dB = VHF: 61°, UHF: 30°	Beamwidth @ -3dB = VHF: 39°, UHF: 22°
Radiation angle deg.	0°	0°	VHF: 0°, UHF: -4°
Polarization	Linear Vertical		
Gain	VHF: 1 dBd - 3.15 dBi, UHF: 3.3 dBd - 5.45 dBi	VHF: 2 dBd - 4.15 dBi, UHF: 4.2 dBd - 6.35 dBi	VHF: 3.2 dBd - 5.35 dBi, UHF: 5.8 dBd - 7.95 dBi
Max Power (CW) @30°C	200 Watts		
Grounding Protection	All metal parts are DC-grounded, the inner conductor is coupled capacitively		
Connector	N-female, gold plated central pin		


#### Mechanical Data

Materials	Fiberglass, Aluminium, Stainless Steel, Brass		
Wind Load @ 150 km/h	37 N	56 N	81 N
Wind Resistance	200 Km/h	180 Km/h	160 Km/h
Wind Surface	0.03 m <sup>2</sup>	0.05 m <sup>2</sup>	0.07 m <sup>2</sup>
Height (approx.)	1325 mm	1780 mm	2790 mm
Weight (approx.)	810 gr	900 gr	1250 gr
Radial Length (approx.)	170 mm	170 mm	495 mm
Mounting Mast	Ø 35-54 mm		
P/N	2106420.00	2103420.00	2106520.00


**SA 270 SN, SA 270 MN and SA 270 LN are available for USA ham band (144-148 & 440-450 MHz)**

#### SA 270 SN



TYPICAL RADIATION PATTERN in E-plane at 145 MHz  
File: F-04-002 Scale: logarithmic



TYPICAL RADIATION PATTERN in E-plane at 435 MHz  
File: F-04-002 Scale: logarithmic




#### TYPICAL S.W.R. RESPONSE




#### SA 270 MN



TYPICAL RADIATION PATTERN in E-plane at 145 MHz  
File: F-04-001 Scale: logarithmic



TYPICAL RADIATION PATTERN in E-plane at 435 MHz  
File: F-04-001 Scale: logarithmic




#### TYPICAL S.W.R. RESPONSE




#### SA 270 LN



TYPICAL RADIATION PATTERN in E-plane at 145 MHz  
File: F-04-003 Scale: logarithmic



TYPICAL RADIATION PATTERN in E-plane at 435 MHz  
File: F-04-003 Scale: logarithmic



#### TYPICAL S.W.R. RESPONSE







## SD 1300 U/N, SD 2000 U/N, SD 3000 U/N

### Sirio Discone Wide-band

#### Features:

- # Base station antenna, Omnidirectional, Unity-gain
- # Extremely wide-band suitable for scanner use
- # Transmission capability in several Ham bands
- # Perfect protection against the worst weather conditions
- # Stainless steel hardware and radials
- # Equipped with anodized aluminium bracket for an easy side mast installation
- # 17/7 PH stainless steel cylindrical whip

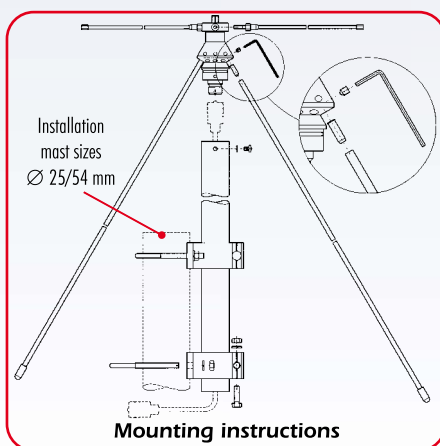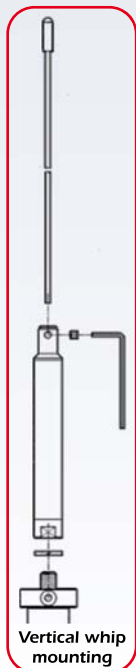

SD 1300 U/N

SD 2000 U/N

SD 3000 U/N






# SD 1300 U/N, SD 2000 U/N, SD 3000 U/N

## Sirio Discone Wide-band


Electrical Data	SD 1300 U/N	SD 2000 U/N	SD 3000 U/N
Type	Discone		
Frequency Range	RX band: 25-1300 MHz TX band (@ SWR ≤ 2): 49.5-50.5, 120-180, 215-300, 415-465, 610-650, 710-1000, 1130-1300MHz	RX band: 100-2000 MHz TX band (@ SWR ≤ 2): 130-160, 215-440, 610-685, 870-960, 1070-1500, 1620-1800, 1860-2000MHz	RX band: 300-3000 MHz TX band (@ SWR ≤ 2): 340-535, 545-960, 1180-1380, 1660-1910, 1980-3000 MHz
Impedance	50 Ω		
Radiation (H-plane)	360° Omnidirectional		
Radiation (E-plane)	Frequency dependent, see the pattern		
Radiation angle deg.	Frequency dependent, see the pattern		
Polarization	Linear Vertical		
Gain	0 dBd - 2.15 dBi @ lowest frequency		
Max Power (CW) @ 30°C	VHF: 300 Watts, UHF: 200 Watts	200 Watts	200 Watts
Connector	UHF-female, gold plated central pin or N-female, gold plated central pin		
<b>Mechanical Data</b>			
Materials	Stainless Steel, Chromed Brass, Aluminium, Nylon		
Wind Load @ 150 km/h	66 N	44 N	32 N
Wind Resistance	130 Km/h	150 Km/h	150 Km/h
Wind Surface	0.06 m²	0.04 m²	0.03 m²
Height (approx.)	1600 mm	900 mm	725 mm
Weight (approx.)	1140 gr	1020 gr	830 gr
Cone Radial Length	810 mm	550 mm	270 mm
Mounting Mast	Ø 25-54 mm		
P/N with UHF connector	2105405.00	2109005.00	2109205.00
P/N with N connector	2105505.00	2109105.00	2109305.00

### SD 1300 U/N



TYPICAL RADIATION PATTERN in E-plane at 145 MHz  
File: E-05-002 Scale: logarithmic



TYPICAL RADIATION PATTERN in E-plane at 437 MHz  
File: E-05-002 Scale: logarithmic




TYPICAL S.W.R. RESPONSE




### SD 2000 U/N



TYPICAL RADIATION PATTERN in E-plane at 915 MHz  
File: E-05-004 Scale: logarithmic



TYPICAL RADIATION PATTERN in E-plane at 1800 MHz  
File: E-05-004 Scale: logarithmic




TYPICAL S.W.R. RESPONSE




### SD 3000 U/N



TYPICAL RADIATION PATTERN in E-plane at 915 MHz  
File: E-05-006 Scale: logarithmic



TYPICAL RADIATION PATTERN in E-plane at 1800 MHz  
File: E-05-006 Scale: logarithmic



TYPICAL S.W.R. RESPONSE

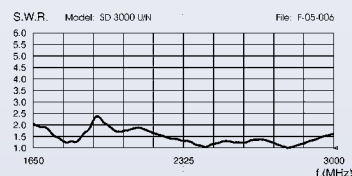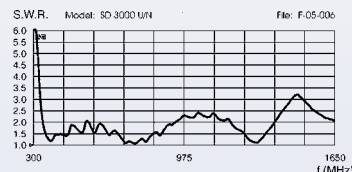

## SU series

### Sirio UHF 368...480 MHz

#### Features:

- # Mobile antenna, Mono-band, Omnidirectional, Tunable by whip cutting
- # SU 370-490, SU 375-480 PL: Medium-gain. SU 3 5/8 black: Low-gain
- # 17/7 PH stainless steel spring whip
- # SU 375-480 PL: suitable for fitting on magnetic mounts, angular connectors or portable transceiver
- # Magnetic mount version available


Electrical Data	SU 375-480 PL	SU 370-490	SU 3 5/8
Type	1/4 $\lambda$ + 1/2 $\lambda$ colinear	1/4 $\lambda$ + 1/2 $\lambda$ colinear	5/8 $\lambda$
Frequency Range	tunable 375...480MHz	tunable 368...490MHz	tunable 400...470 MHz
Impedance	50 $\Omega$		
Radiation (H-plane)	360° Omnidirectional		
Polarization	Linear Vertical		
Gain	3.5 dB ref. to $\lambda/4$ whip	3.5 dB ref. to $\lambda/4$ whip	2 dB ref. to $\lambda/4$ whip
SWR @ res. freq.	$\leq 1.6^*$	$\leq 1.2$	$\leq 1.3$ @ 400 MHz
Bandwidth @ SWR $\leq 2$	$\geq 30\text{MHz}$ @ 375 MHz*	$\geq 20\text{MHz}$ @ 368 MHz	$\geq 20$ MHz @ 400 MHz
Max Power (CW) @30°C	100 Watts		
Standar Mount	/	"SL" Type	"SL" black type
Cable Lenght / Type	/	5 m / RG 58	5 m / RG 58
Connector	UHF-male (PL259)	/	/

#### Mechanical Data


Materials	Stainless Steel, Nylon, Chromed Brass		
Height (approx.)	760 mm	745 mm	525 mm
Weight (approx.)	160 gr	420 gr	360 gr
Mounting Hole	/	$\varnothing 19$ mm	$\varnothing 19$ mm
P/N radiator only	2430405.05	2405505.01	2405406.02
P/N "SL" chrome	/	2205505.32	/
P/N "SL" black	/	2205506.33	2205406.33
P/N "SL-S" black	/	/	2205406.34
P/N "MAG H12S"	/	2205505.61	/
P/N "MAG H12S" black	/	2205506.61	/

\* measured on SIRIO's magnetic mount MAG H 12 PL




TYPICAL S.W.R. RESPONSE

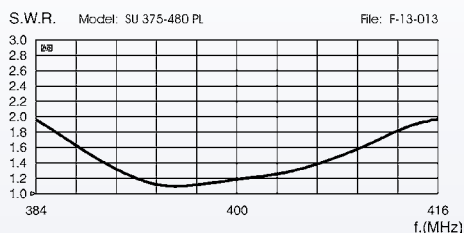

TYPICAL S.W.R. RESPONSE

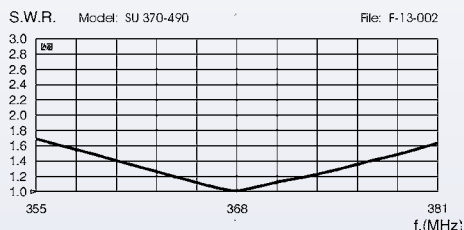

TYPICAL S.W.R. RESPONSE

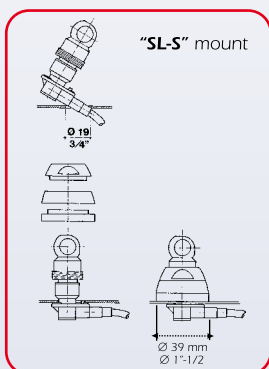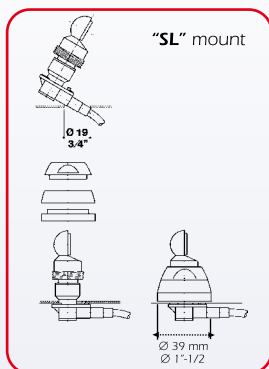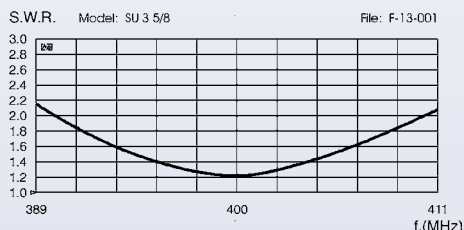

SU 375-480 PL

SU 370-490



SU 3 5/8  
 black

## HP 7000, HP 7000 C




### High Performance Series 70cm band

#### Features:


- # Mobile antenna, Mono-band
- # Omnidirectional
- # HP 7000: Low-gain,  
HP 7000 C: High-gain
- # Protection from static discharges DC-Ground
- # 17/7 PH stainless steel cylindrical whip
- # 90° tiltable whip and detachable for car-washes access
- # Wide range of optional mounting bases available
- # Magnetic mount version available

Electrical Data	HP 7000	HP 7000 C
Type	5/8 $\lambda$	2 x 5/8 $\lambda$
Frequency Range	426 - 442 MHz @ SWR $\leq 2$	429 - 440 MHz @ SWR $\leq 2$
Impedance	50 $\Omega$	
Radiation (H-plane)	360° Omnidirectional	
Polarization	Linear Vertical	
Gain	2 dB ref. to $\lambda/4$ whip	5 dB ref. to $\lambda/4$ whip
Max Power (CW) @30°C	100 Watts	
Grounding Protection	All metal parts are DC-grounded, the inner conductor is coupled capacitively	
Connector	UHF-male (PL 259)	
Mechanical Data		
Materials	Stainless steel 17/7 PH, Nylon, Chromed Brass	
Height (approx.)	435 mm	990 mm
Weight (approx.)	250 gr	320 gr
P/N	2210505.05	2210605.05

Both models available for USA ham band (440-450 MHz)

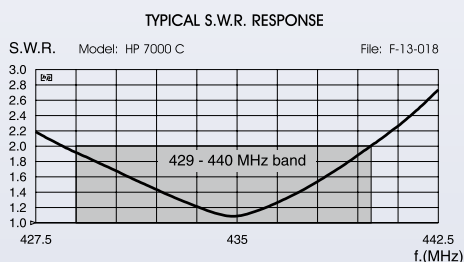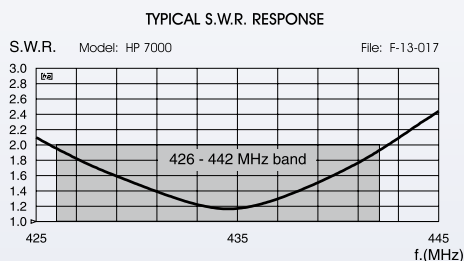

"HP-AC/U" mount  
Hole installation  
P/N 2510805.00

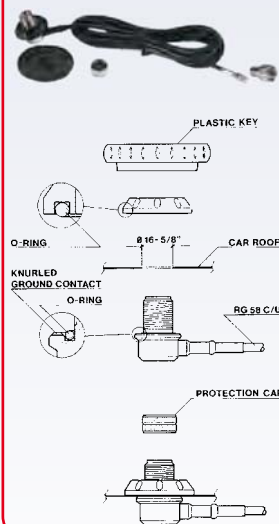

HP MAG 125 PL  
Magnetic Mount  
P/N 2511202.05



HP MAG H-12 PL  
Magnetic Mount  
P/N 2511802.05



HP 7000

HP 7000 C



## LPA series

### Low Profile Antenna 380...470 MHz

#### Features:


- # Low profile mobile antenna designed for use on vehicles operating under severe height limitations such as buses, trains, trams, etc
- # Unity-gain omnidirectional mono-band
- # Protection from static discharges DC-Ground
- # Tunable by acting on internal screw

Electrical Data	LPA 380	LPA 420
Frequency Range	tunable 380...430 MHz	tunable 420...470 MHz
Impedance	50 $\Omega$	
Radiation (H-plane)	360° Omnidirectional	
Radiation (E-plane)	Beamwidth @ -3 dB = 78°	
Polarization	Linear Vertical	
Gain	2 dBi (0 dB ref. to $\lambda/4$ whip) @ resonant freq.	
SWR @ res. freq.	Typically $\leq 1.5$ @ resonant freq.	
Bandwidth @ SWR $\leq 2$	Typically 2.5% @ center freq.	
Max Power (CW) @30°C	100 Watts	
Grounding Protection	All metal parts are DC-grounded, the inner conductor is coupled capacitively	
Cable Length / Type	1m / RG 58 C/U	
Connector	Standard: BNC-male, other on request	


#### Mechanical Data

Materials	ABS UV stabilized, Aluminium, Brass	
Operating temperature	-40° C to +80°C	
Dimensions (approx.)	$\varnothing$ 183 mm, height 36 mm	
Weight (approx.)	400 gr	
Mounting Hole	6x $\varnothing$ 4.5 mm + 2x $\varnothing$ 16mm	
P/N	2219003/380	2219003/420

**Remark:** Optimum performance is achieved when the antenna is fitted on a metallic ground plane  $\lambda/2$  square.

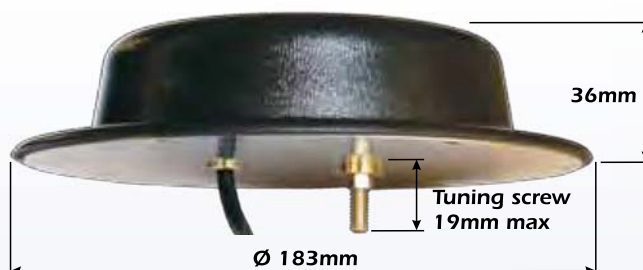

TYPICAL RADIATION PATTERN IN E-plane at mid-band  
File: E-13-042 Scale: logarithmic

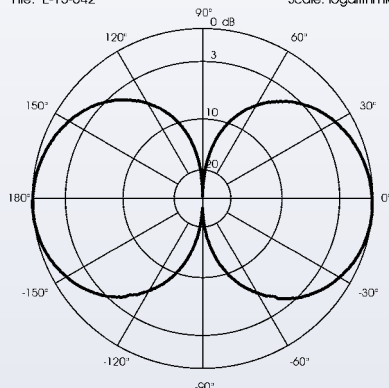

#### Mounting and tuning instructions





### "S" Mount

Frequency Range: from DC to 300 MHz  
 Overall Size:  $\varnothing$  42 mm  
 Mounting Hole:  $\varnothing$  19 mm  
 1 "S" Chrome ..... 2501002.01  
 2 "S" Black ..... 2501002.02



### "SL" Mount

Frequency Range: from DC to 500 MHz  
 Overall Size:  $\varnothing$  39 mm  
 Mounting Hole:  $\varnothing$  19 mm  
 1 "SL" Chrome ..... 2501102.01  
 2 "SL" Black ..... 2501102.02



### "SL-S" Mount

Frequency Range: from DC to 500 MHz  
 Overall Size:  $\varnothing$  39 mm  
 Mounting Hole:  $\varnothing$  19 mm  
 "SL-S" Black ..... 2501102.04



### "ML" Mount

Frequency Range: from DC to 1000 MHz  
 Overall Size:  $\varnothing$  30mm  
 Mounting Hole:  $\varnothing$  14 or 18 mm  
 "ML" ..... 2501202.06



### "Screw & Bolt"

Materials: Chrome plated Brass and Zamak  
 1 Chrome ..... 2506206.00  
 2 Black ..... 2506207.00



### "Wing Bolt"

Materials: Chrome plated Brass  
 1 Chrome ..... 2506306.00  
 2 Black ..... 2506307.00



### "Safety Set"

Materials: Chrome plated Brass and Zamak  
 1 Chrome ..... 2506506.00  
 2 Black ..... 2506507.00



### "TRUNK TOP 2" Mount

Cable / Connector: 5.5m RG 58 / UHF-male  
 Connection: UHF-female or DV joint  
 DV to PL Chrome ..... 2504406.12  
 DV to PL Black ..... 2504407.13



### "ABN" Trunk Mount

Fixing Hole:  $\varnothing$  16 mm  
 Material: Painted Steel  
 ABN Black ..... 2504105.00



### "KF" Gutter Mount

Fixing Hole:  $\varnothing$  16 mm  
 Material: Painted Zamak  
 1 KF Black only ..... 2504205.00  
 1 + 2 KF Black w/Cable SO239 ..... 2504205.20



### "FT-2 Universal", "FT-3", "FT-4" Fixing Bracket

Top Size for antenna fitting: FT-2, FT-4 =  $\varnothing$  38 mm, FT-3 =  $\varnothing$  30 mm  
 Bottom Size: FT-2 =  $\varnothing$  45/50 mm most fitting, FT-3 =  $\varnothing$  35/54 mm most fitting, FT-4 = 2x  $\varnothing$  9 mm wall fitting (screws not included).  
 Weight (approx.): FT-2 = 1100 gr, FT-3 = 350gr, FT-4 = 780gr  
 Material: FT-2, FT-4 = Galvanized Steel, FT-3 = Anodized aluminium, Stainless steel  
 FT-2 Universal ..... 2510004.00, FT-3 ..... 2511301.00, FT-4 ..... 2513404.00



### "M-1", "M-2" Marine Brackets

Dimension: M1: 38x64x98mm, M2: 38x100x180mm  
 Material: Stainless Steel. Mounting Hole: 2x  $\varnothing$  16mm  
 1 M-1 Marine Bracket ..... 2503503.00  
 2 M-2 Marine Bracket ..... 2503203.00  
 3 With Optional fixing set ..... 2503203.00/SA or 2503503.00/SA



### "M-3" Marine Mount

Connection: standard 1"x14 threads  
 Dimension L x W x H : 60 x 95 x 130 mm  
 Weight (approx.): 860 gr  
 Materials: Chromed Brass, Stainless steel hardware  
 M-3 OT Marine Mount ..... 2503606.00



### "M-8" Marine Mount

Connection: standard 1"x14 threads  
 Dimension L x W x H : 67 x 94 x 124 mm  
 Weight (approx.): 330 gr  
 Materials: Nylon, Stainless steel hardware  
 M-8 NY Marine Mount ..... 2503301.00



### "M-10" Marine Mount

Connection: standard 1"x14 threads  
 Fixing diameter: 1"  
 Weight (approx.): 600 gr  
 Materials: Chromed Brass, Stainless steel hardware  
 M-10 OT Marine Mount ..... 2503406.00





### "MAG H 12" Magnet Mount

Frequency Range: from DC to 500 MHz. Overall size: Ø 92 mm  
Materials: Ferrite magnet, Chromed Brass, Nylon, Rubber protection  
Cable / Connector: 3.6 m RG 58 / PL 259 R male

MAG H 12 PL .....	2502502.05
MAG H 12 S .....	2502502.01
MAG H 12 S Black .....	2502502.02
MAG H 12 3/8 .....	2502502.03



### "MAG 145" Magnet Mount

Frequency Range: from DC to 500 MHz. Overall size: Ø 160 mm  
Materials: Ferrite magnet, Chromed Brass, Nylon, Rubber protection  
Cable / Connector: 3.6 m RG 58 / PL 259 R male

MAG 145 PL .....	2502702.05
MAG 145 S .....	2502702.01
MAG 145 S Black .....	2502702.02
MAG 145 3/8 .....	2502702.03



### "HP MAG H 12 PL" Magnet Mount

Frequency Range: from DC to 500 MHz  
Overall size: Ø 92 mm  
Materials: Ferrite magnet, Chromed Brass, Nylon, Rubber protection, PTFE insulator, Gold plated pin  
Cable: 3.6m RG58 C/U MIL C17  
HP MAG H 12 PL .....

2511802.05



### "HP-AC/U" Angular Connector

Frequency Range: from DC to 500 MHz.  
Materials: Brass nichel plated, PTFE insulator, 5m RG58 C/U MIL C17  
HP-AC/U .....

2510805.00

## AVAILABLE CONNECTION



### MAG .... S

Tiltable Joint Chromed or black



### MAG .... PL

UHF-female connector



### MAG .... 3/8

3/8" connection



### "MAG 125" Magnet Mount

Frequency Range: from DC to 500 MHz. Overall size: Ø 127 mm  
Materials: Ferrite magnet, Chromed Brass, Nylon, Rubber protection  
Cable / Connector: 3.6 m RG 58 / PL 259 R male

MAG 125 PL .....	2502602.05
MAG 125 S .....	2502602.01
MAG 125 S Black .....	2502602.02
MAG 125 3/8 .....	2502602.03



### "MAG 160" Magnet Mount

Frequency Range: from DC to 500 MHz. Overall size: Ø 166 mm  
Materials: Chromed Brass, Nylon, Magnetic Rubber  
Cable / Connector: 3.6 m RG 58 / PL 259 R male

MAG 160 PL .....	2502802.05
MAG 160 S .....	2502802.01
MAG 160 S Black .....	2502802.02
MAG 160 3/8 .....	2502802.03



### "HP MAG 125 PL" Magnet Mount

Frequency Range: from DC to 500 MHz  
Overall size: Ø 127 mm  
Materials: Ferrite magnet, Chromed Brass, Nylon, Rubber protection, PTFE insulator, Gold plated pin  
Cable: 3.6m RG58 C/U MIL C17  
HP MAG 125 PL .....

2511202.05



### "Antennas Display"

Materials: Silver painted zamak with rubber gasket  
Fixing Hole: 8 x Ø 12.5 mm  
ANTENNAS DISPLAY .....

2508008.00



### "Antennas' Dispenser"

Overall Dimension W x H: 86 x 230 cm  
Material: Painted steel.  
Antenna's dispenser .....

Max weight capacity: 20 Kg  
32.0002





**SMA-male**

Frequency: from DC to 9 GHz. Materials: Nickel plated brass, PTFE insulator, Gold plated pin.  
Crimp type for RG 58, CO 100 ..... 30.SMA001.00  
Crimp type for RG 174, RG 316 .... 30.SMA002.00



**SMA-female**

Frequency: from DC to 9 GHz. Materials: Nickel plated brass, PTFE insulator, Gold plated pin.  
Crimp type for RG 58, CO 100 ..... 30.SMA003.00  
Crimp type for RG 174, RG 316 .... 30.SMA004.00



**SMA-male Reverse Polarity**

Frequency: from DC to 9 GHz. Materials: Nickel plated brass, PTFE insulator, Gold plated pin.  
Crimp type for RG 58, CO 100 ..... 30.SMA005.00  
Crimp type for RG 174, RG 316 .... 30.SMA006.00



**SMA-female Panel**

Frequency: from DC to 9 GHz. Materials: Nickel plated brass, PTFE insulator, Gold plated pin.  
Crimp type for RG 58, CO 100 ..... 30.SMA008.00  
Crimp type for RG 174, RG 316 .... 30.SMA007.00



**FME-male**

Materials: Nickel plated brass, PTFE insulator, Gold plated central pin.  
Crimp type for RG 58, CO 100 ..... 30.FME001.00  
Crimp type for RG 174, RG 316 .... 30.FME005.00



**FME-female**

Materials: Nickel plated brass, Delrin insulator, Gold plated central pin.  
Crimp type for RG 58, CO 100 ..... 30.FME002.00  
Crimp type for RG 174, RG 316 .... 30.FME003.00



**N-male**

Frequency: from DC to 6 GHz. Materials: Nickel plated brass, PTFE insulator, Gold plated pin.  
Crimp type for RG 58, CO 100 ..... 30.N001.00



**N-female**

Frequency: from DC to 6 GHz. Materials: Nickel plated brass, PTFE insulator, Gold plated pin.  
Crimp type for RG 58, CO 100 ..... 30.N002.00



**BNC-male**

Frequency: from DC to 4 GHz. Materials: Nickel plated brass, PTFE insulator, Gold plated pin.  
Crimp type for RG 58, CO 100 ..... 30.BNC001.00



**TNC-male**

Frequency: from DC to 4 GHz. Materials: Nickel plated brass, PTFE insulator, Gold plated pin.  
Crimp type for RG 58, CO 100 ..... 30.TNC001.00



**TNC-male Reverse Polarity**

Frequency: from DC to 4 GHz. Materials: Nickel plated brass, PTFE insulator, Gold plated pin.  
Crimp type for RG 58, CO 100 ..... 30.TNC002.00



**FME-m / UHF-m adaptor**

Materials: Nickel plated brass, Delrin insulator, Gold plated central pin.  
P/N ..... 30.AD002.00



**FME-m / TNC-m adaptor**

Materials: Nickel plated brass, Delrin insulator, Gold plated central pin.  
P/N ..... 30.AD003.00



**FME-m / Mini UHF-m adaptor**

Materials: Nickel plated brass, Delrin insulator, Gold plated central pin.  
P/N ..... 30.AD004.00



**FME-m / BNC-m adaptor**

Materials: Nickel plated brass, Delrin insulator, Gold plated central pin.  
P/N ..... 30.AD005.00



**FME-m / N-m adaptor**

Materials: Nickel plated brass, Delrin insulator, Gold plated central pin.  
P/N ..... 30.AD006.00

## COAXIAL CABLES Data

Type	Impedance	External diameter	Colour
RG 58 C/U	50 Ω	4.95 mm	Black
CO 100	50 Ω	4.95 mm	White
RG 174	50 Ω	2.8 mm	Black
RG 316/U	50 Ω	2.5 mm	Brown

## Attenuation dB for 100 m

Freq. Cable	25 MHz	50 MHz	100 MHz	200 MHz	300 MHz	400 MHz	500 MHz	800 MHz	1 GHz	1.6 GHz	1.8 GHz	2.0 GHz	2.2 GHz	2.4 GHz	2.5 GHz	3.0 GHz
RG 58 C/U	7	10	15	21	26	30	34	44	50	66	70	76	78	86	87	98
CO 100	5	7	10	14	17	20	23	29	33	42	45	48	50	53	54	60
RG 174	13	18	27	39	48	56	64	84	95	124	133	141	150	159	162	184
RG 316/U	12	17	26	38	47	55	62	80	91	118	126	134	141	149	152	169

## Introduction to the radiation patterns coordinate and plotting.

The technical data published on this catalog have been measured by means of the last generation of sophisticated equipment to minimise doubts or mistakes on measurements. When comparing two radiation diagrams you should keep into consideration following points:

- # Check that all patterns in this catalog have been normalized ( the outside of the pattern is the maximum gain of the antenna).
- # A very important point to remember it is that the shape of a pattern ( its general appearance ) is highly dependent on the grid system used for the plotting.
- # Our radiation polar patterns are represented in 30 dB logarithmic grid scale like most part of manufacturers. The main goal of such diagrams is to amplify the maximum gain area to better show all details.

## Gain measurement methods.

The gain values for base and marine antennas are expressed in dBd (Decibel relative to 1/2 wave dipole) and they are the result of the comparison between the reference antenna, in this case the 1/2 wave dipole, and the antenna to test. Same measurement method is used for vehicular antennas but the difference is the reference antenna which is a 1/4 wave whip mounted on centre car roof. It's possible to calculate the gain value in dBi (decibel relative to Isotropic radiator) or in dBd (decibel relative to 1/2 wave dipole) by adding or deducting 2.14 to the available value. If the available value is expressed in dBd you should add 2.14 to get the equivalent in dBi (Ex: 3 dBd + 2.14 = 5.14 dBi); if the value is expressed in dBi you should deduct 2.14 to get the equivalent value in dBd (Ex: 5.14 dBi - 2.14 = 3 dBd).

## Antenna radiation patterns.

An antenna radiating in space produces all around a high frequency electromagnetic field that can be considered as a 3D solid part ( see fig 3-A and 3-B). The radiation diagram is the graphic representation in polar or rectangular coordinates of the function signal-angle and it is a section of the solid diagram in its two main planes: electrical plane E (it contains the radiant element) and magnetic plane H (it's perpendicular to the radiant element).

From the radiation diagram you can get quite important parameters like:

Radiation Angle, Half Power Beamwidth, side lobes level, front-to-back ratio.

Radiation angle ( A ): is the angular value expressed in degree (°) respect to the horizon where the maximum gain has been measured (see fig 1 and fig 2). This is a very important value for long distance connection (DX) both for the omnidirectional and directional antennas. This parameter is directly influenced by the relation between wave-length and ground height.

Half Power Beam Width (  $\alpha$  ): is the angular value expressed in degree (°) inside which the radiated power is reduced of one half (-3 dB) respect to the maximum value (see fig 1 and fig 2). The -3 dB beamwidth is related to gain. The relationship is such that when gain increases the beamwidth decreases and vice versa.

Side lobes level ( B ): Side lobes are spurious lobes more or less marked that normally are closed to the main lobe and waste power towards undesired directions (see fig 1 and fig 2). To get a better efficiency and higher gain of the main lobe it's necessary to reduce the side lobes to an acceptable level.

Front to back ratio or F/B ratio ( C ): indicated only for directional antennas like: yagi, log-periodic, horn, etc. it is the ratio of the radiated power in a maximum radiation direction to the radiated power in the opposite direction (at 180° from maximum, see fig 1).

## Frequency range,Bandwidth and SWR measurement

For fixed frequency antennas the frequency range is the width inside which the SWR values are kept within specified limits (see fig 4-A). For frequency tunable antennas the frequency range is the frequency shift of resonance from the lower frequency to the high frequency, and the bandwidth is the width inside which the SWR values are kept within specified limits (see fig 4-B). In our technical data the SWR limit are from 1.5 to 2 (according to the model) and the SWR at frequency resonance is typically lower than 1.2. All our published technical data are measured at the antenna connector.

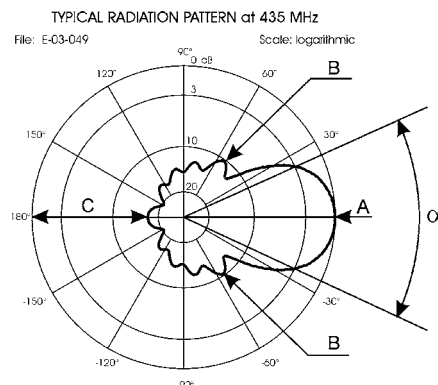


Fig 1

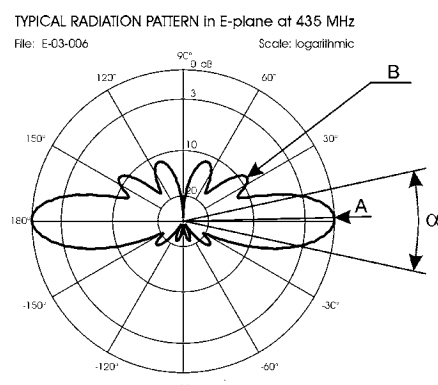


Fig 2

Yagi 3D radiation pattern


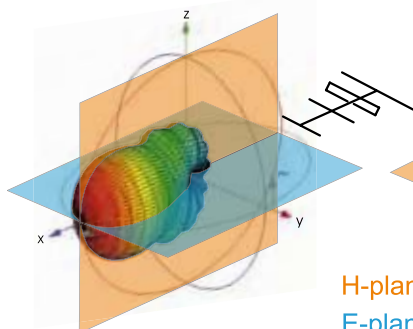



Fig 3 ( A )

Omni 3D radiation pattern

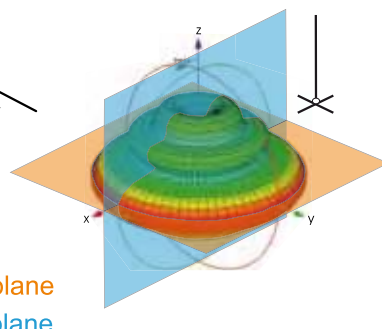


( B )

## TYPICAL S.W.R. OF FIXED FREQUENCY ANTENNAS

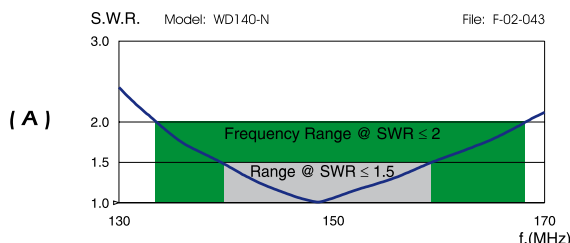

( A )

## TYPICAL S.W.R. OF TUNABLE FREQUENCY ANTENNAS

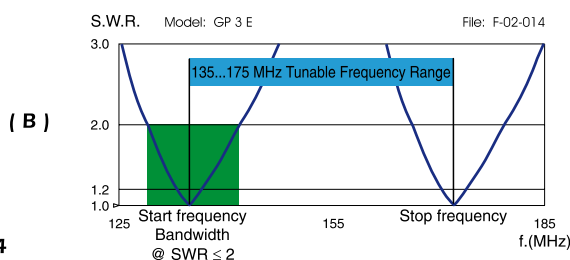

( B )

Fig 4

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. SIRIO ANTENNE reserves the right to change on any time and without prior warning the technical specification on any product in this catalogue. Copyright ©2009



SIRIO ANTENNE Srl, via Liguria 15  
46049 Volta Mantovana, MN - ITALY  
Ph. +39 0376 801515, Fax +39 0376 801254  
[www.sirioantenne.it](http://www.sirioantenne.it) [info@sirioantenne.it](mailto:info@sirioantenne.it)

Antennas designed and manufactured in Italy